CUT Screen Installation Accessory and Installation Guide

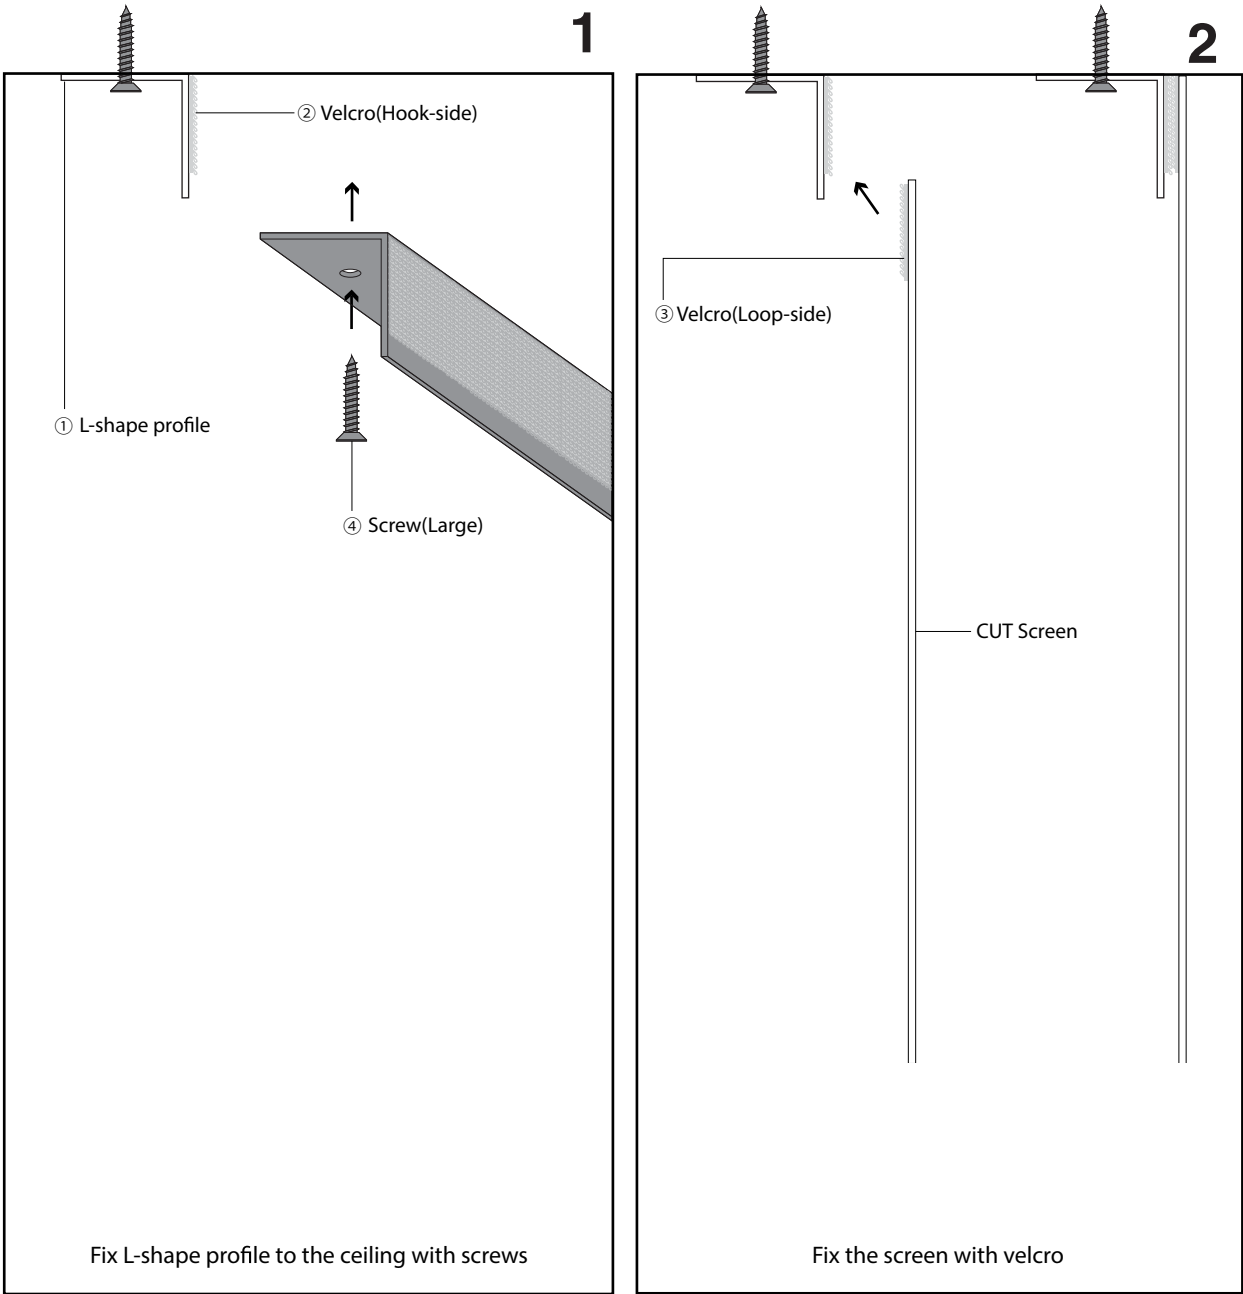# Installation Accessory Option

Velcro Unit
CUT Japan Original Design Unit

- L-shape profile
- Loop-side of Velcro sewn to the top edge of screen
- Hook-side of Velcro fixed to L-shape profile
- Aluminum weight bar (Sewn into the bottom edge of screen)

Also Included
1. Screw (Large)

Cable Unit
CUT Japan Original Design Unit

- Hook
- Cable locking/Adjustment sleeve
- Cable (1.0φ x 1000mm)
- Aluminum profile
- Aluminum rod
- Aluminum weight bar (Sewn into the bottom edge of screen)

Also Included
1. Screw (Small)
2. Screen stopper

Sliding Unit
CUT Japan Original Design Unit

- Rail (Sold separately)
- Runner
- Aluminum profile
- Aluminum rod
- Aluminum weight bar (Sewn into the bottom edge of screen)

Also Included
1. Screw (Small)
2. Screen stopper

Rail
CUT Japan Sliding Rail

- Rail

Also Included
1. Screw (Large)

Optional
1. Runner stopper
2. Rail joint pin

*connecting rails for wide length

Note: 1. Fabric covered alminum profiles for cable units and sliding units could be optionally provided free of charge upon request.   2. Maximum length of sliding rail is 2400mm. Sliding rails over 2400mm are shipped in the form of divided jointable rails.
           3. Sliding unit does not include rails. Sliding system needs both sliding units and rails.
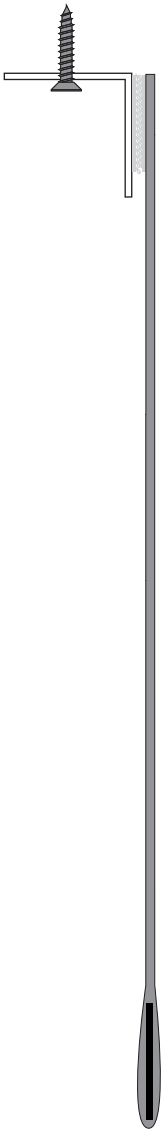
Velcro Unit Installation Mannual

1

② Velcro(Hook-side)

① L-shape profile

④ Screw(Large)

Fix L-shape profile to the ceiling with screws

2

③ Velcro(Loop-side)

CUT Screen

Fix the screen with velcro

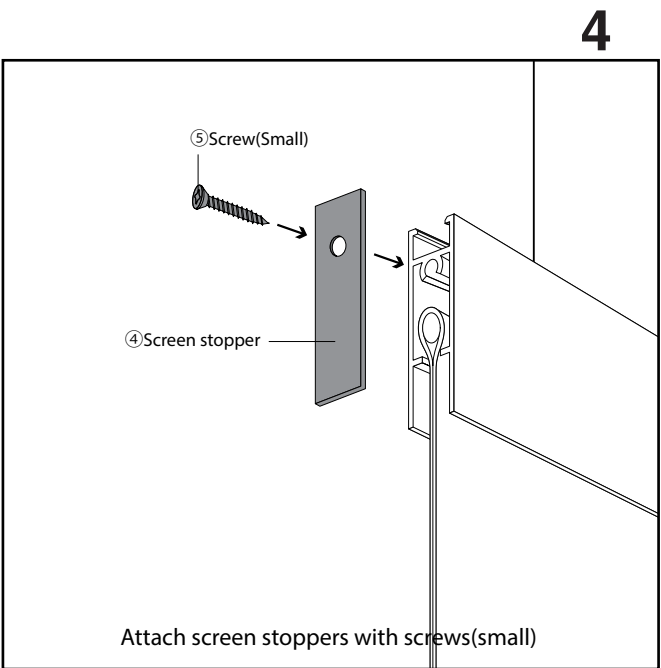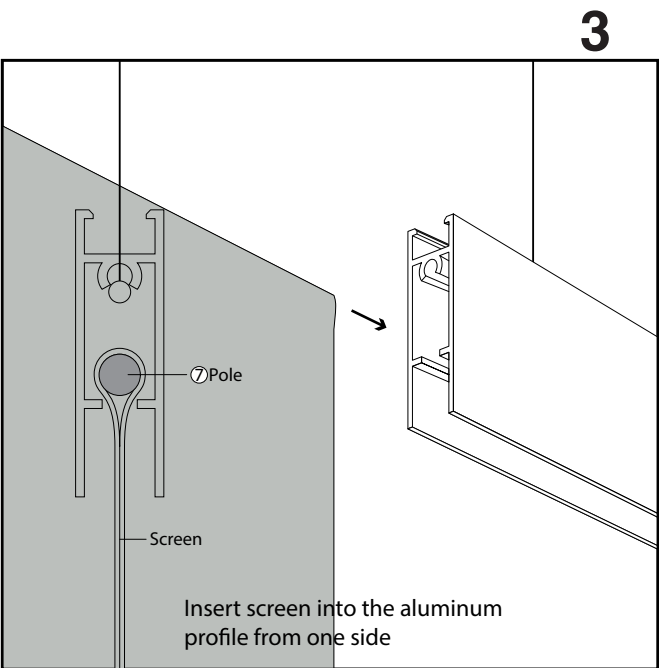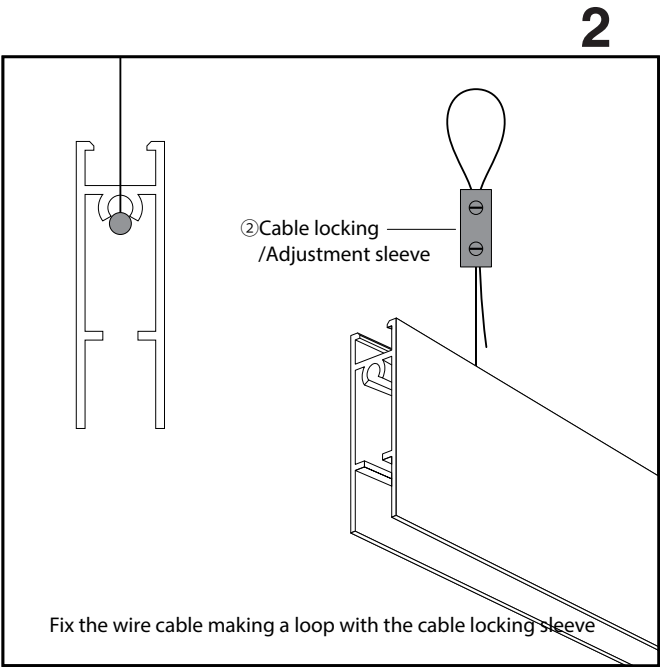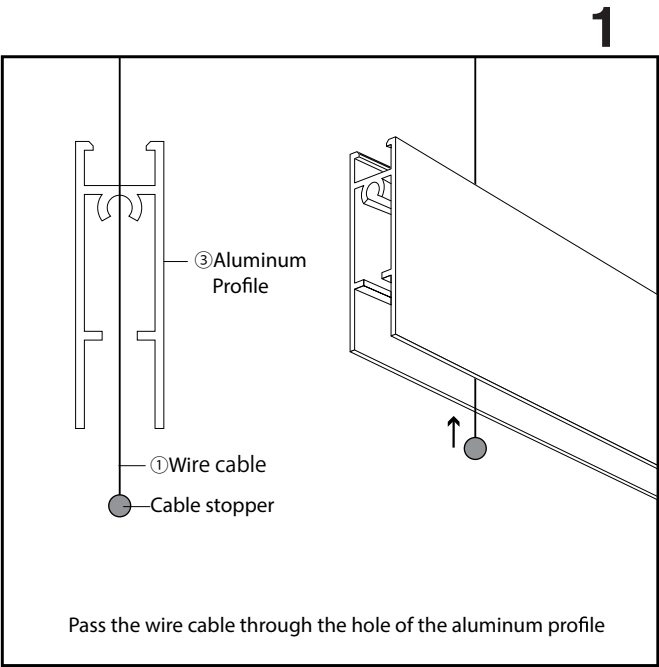## Included Itemes

L-shape profile

Velcro (Hook-side : fixed to L-shape profile)

Velcro (Loop-side: sewn to the top edge of the screen)
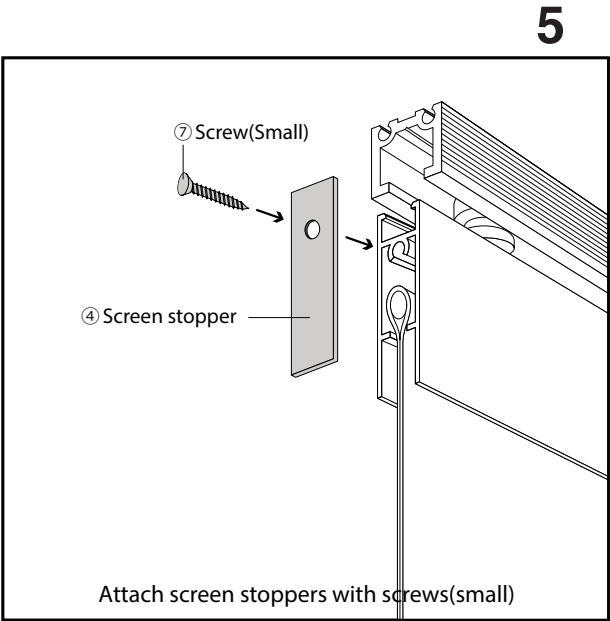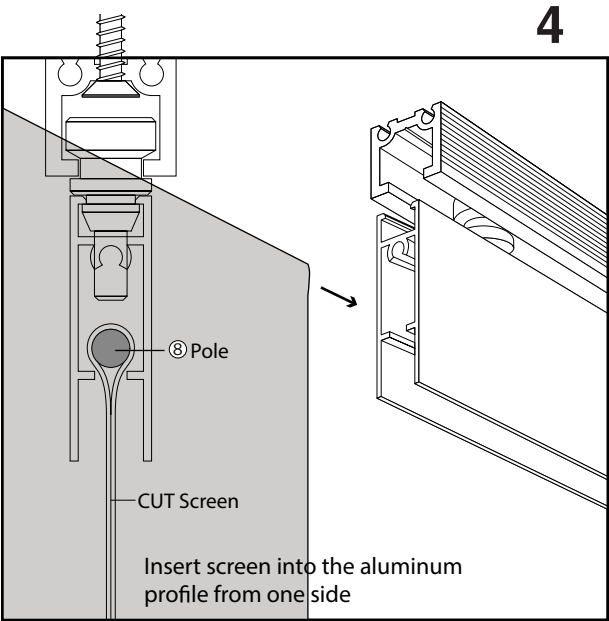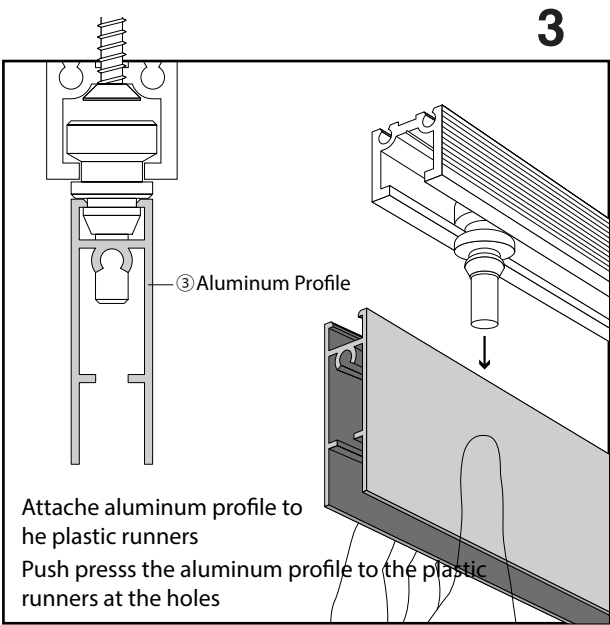
Screw(Large)

Cable Unit Installation Mannual

1

③Aluminum Profile

①Wire cable

Cable stopper

Pass the wire cable through the hole of the aluminum profile

2

②Cable locking /Adjustment sleeve

Fix the wire cable making a loop with the cable locking sleeve

Included Items

Cable (1m) — Cable stopper

Cable locking /Adjustment sleeve — (Screw driver included)

Aluminum profile

Screen stopper

Screw (Small) — Hook

Pole (Inserted to the top of screen)

Aluminum weight bar (Inserted to the bottom of screen)

3

⑦Pole

Screen

Insert screen into the aluminum profile from one side

4

⑤Screw(Small)

④Screen stopper

Attach screen stoppers with screws(small)

Sliding Unit Installation Mannual

1
① Rail
⑦ Screw(Large)

Fix rail to the ceiling with screws

2
② Plastic Runner

Insert plastic runners into the rail

3
③ Aluminum Profile

Attache aluminum profile to he plastic runners

Push presss the aluminum profile to the plastic runners at the holes

x

4
⑧ Pole

CUT Screen

Insert screen into the aluminum profile from one side

5
⑦ Screw(Small)

④ Screen stopper

Attach screen stoppers with screws(small)

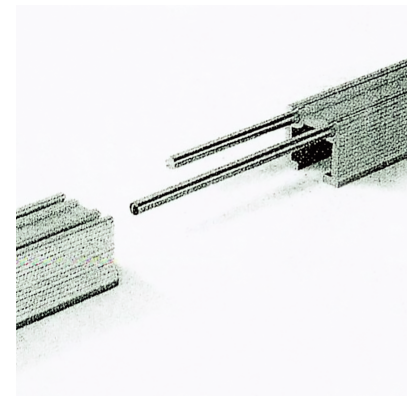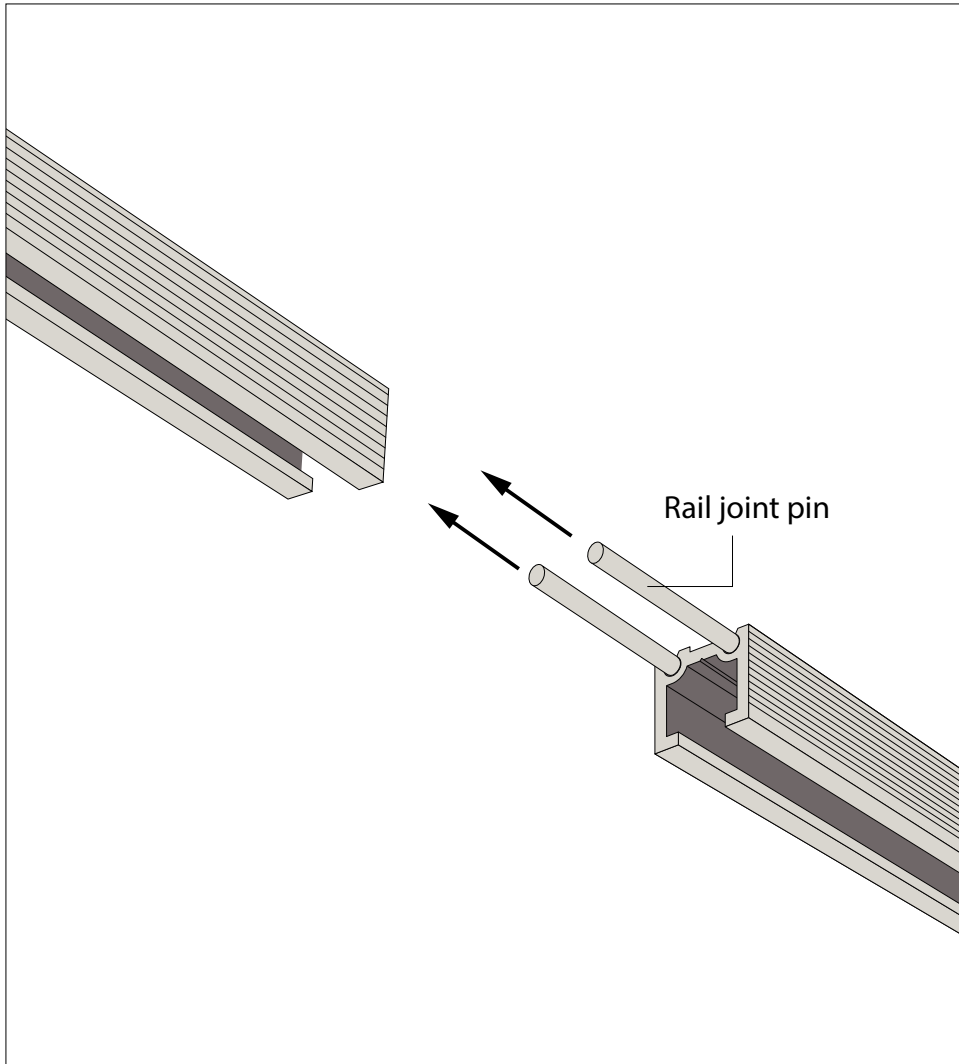## Included Items

Rail

Plastic Runner   Aluminum profile   Screen stopper

Runner Stopper   Rail joint pin

are optional

Screw(Large&Small)

Pole (Inserted to the top of screen)

Aluminum weight bar (Inserted to the bottom of screen)
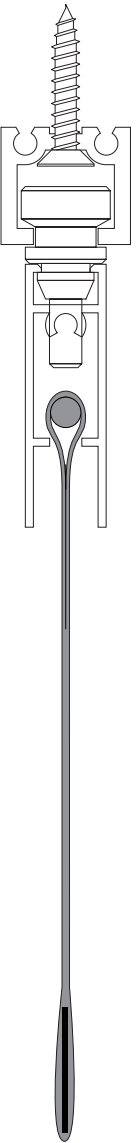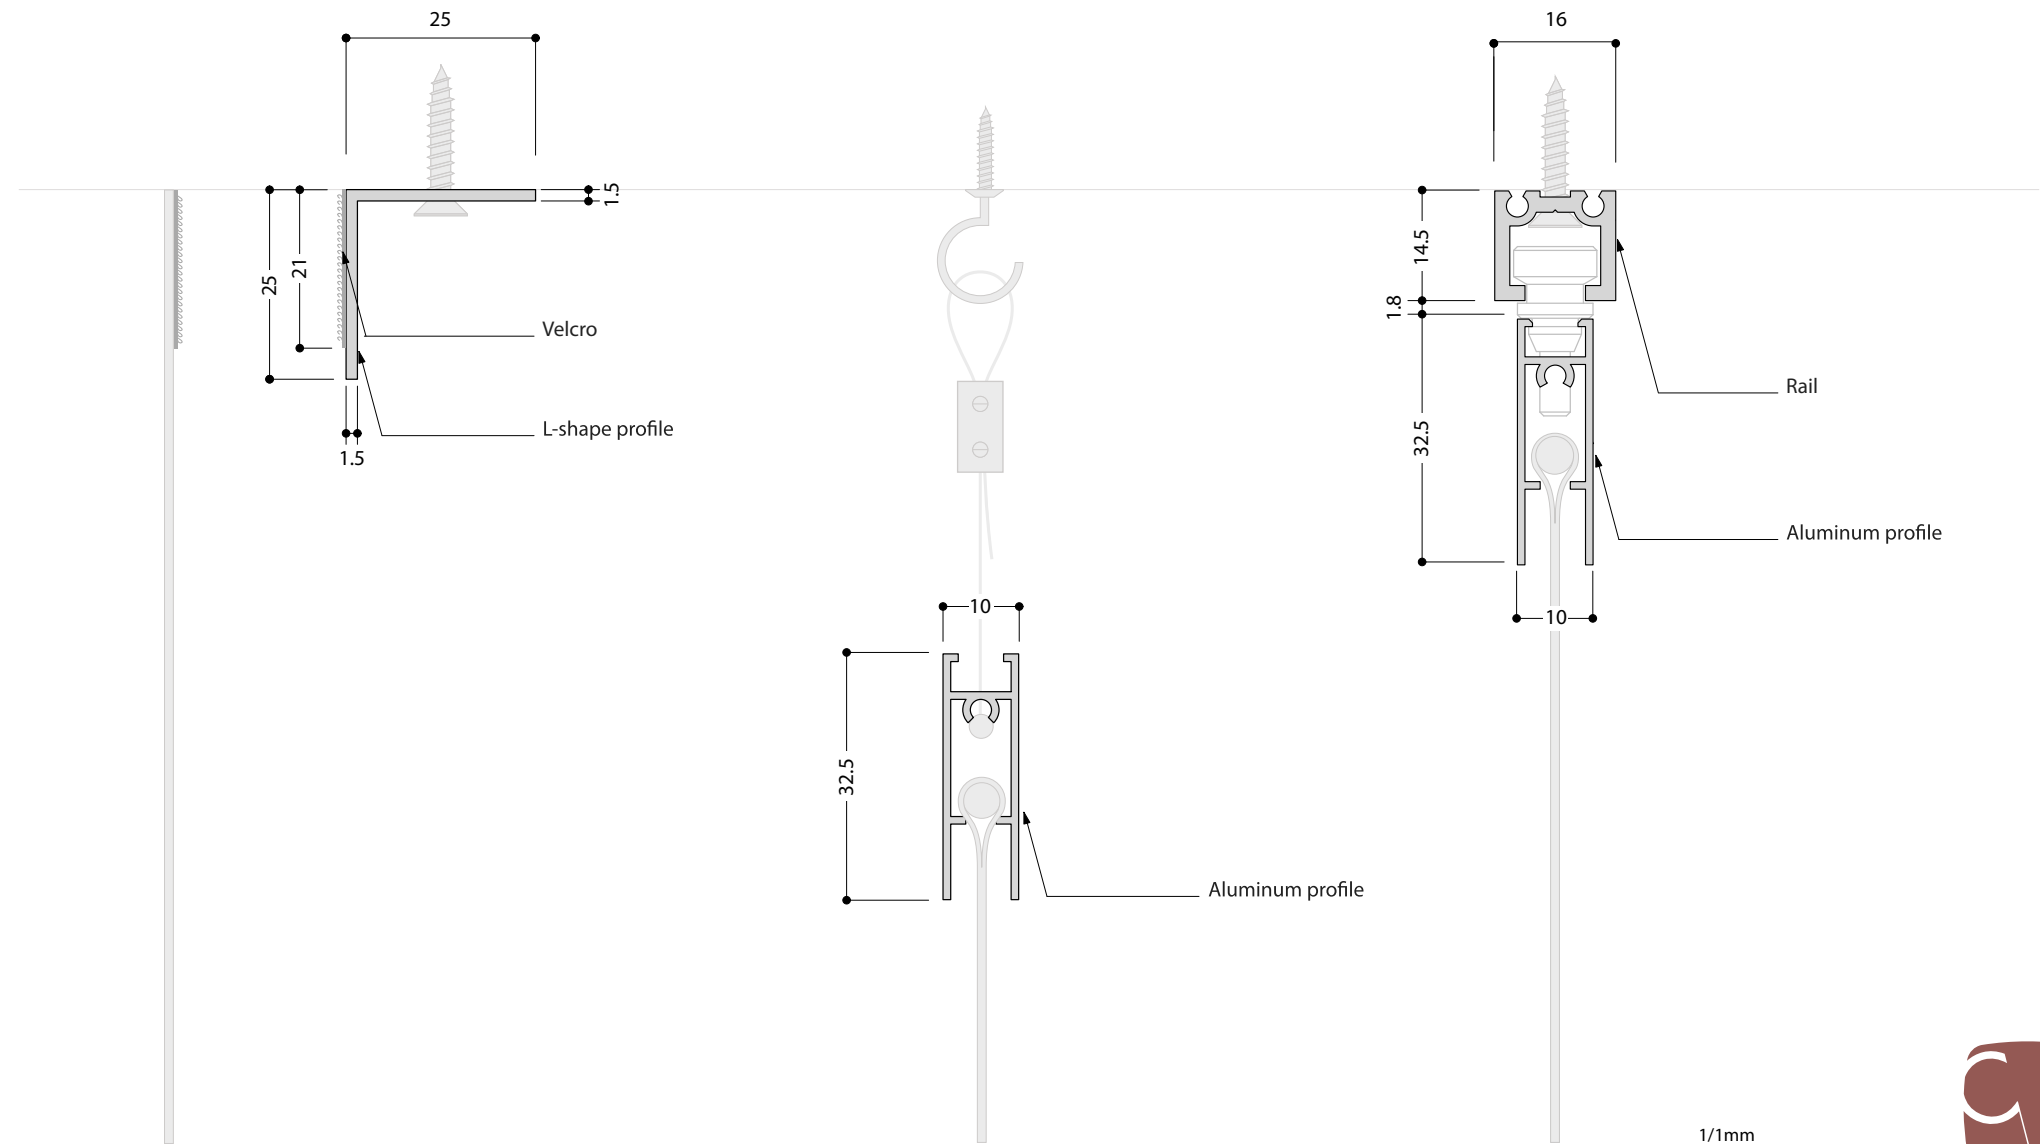
Sliding Unit : Connecting rails with rail joint pins.

Rail joint pin

Appendix-1 : Installation Accessory Dimensions

Velcro Unit

25

1.5

25

21

Velcro

L-shape profile

1.5

Cable Unit

10

32.5

Aluminum profile

Sliding Unit

16

14.5

1.8

32.5

Rail

Aluminum profile

10

1/1mm